
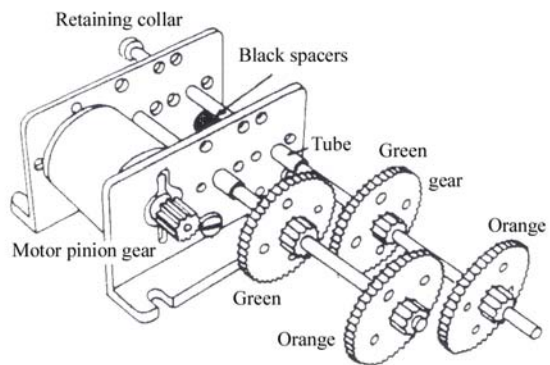


Images SI Inc.
 Staten Island NY 10312
 718.966.3694 Tel
 718.966.3695 Fax
 www.imagesco.com

917D Multi-Ratio Gearbox Datasheet

**GEARBOX DIMENSIONS.
(917D)**

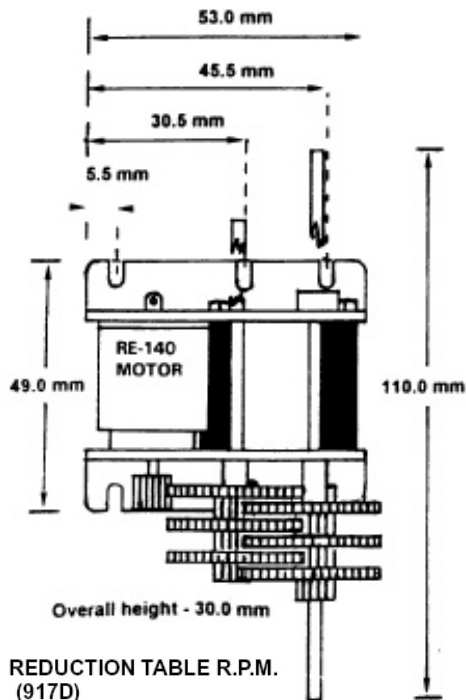

**REDUCTION TABLE R.P.M.
(917D)**

	1.5V	3.0V
4:1	1850	3700
16:1	462	925
64:1	115	231
256:1	29	57
1024:1	7	14
4096:1	2	4

The unit operates on 1.5 & 3V DC power sources, either battery or suitable transformer. Its simple versatile design and sturdy construction make it suitable for a host of uses from powering models and robots to teaching the principles of mechanics. Current consumption depends on eventual load but is within the range of .2 to .8 amps. The output shaft is 3mm diameter.

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL TORQUE	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	STALL TORQUE	
			R.P.M.	A	R.P.M.	A	oz - in	g - cm	W	%	oz - in	g - cm
RE - 140	1.5 - 3.0	3.0v CONSTANT	14800	0.300	11500	1.05	0.152	10.92	1.29	41.03	0.68	49.0